


# Best Available Copy



Canadian  
Intellectual Property  
Office

An Agency of  
Industry Canada

Office de la Propriété  
Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

(11) **CA 2 215 441**

(13) **C**

(40) 12.09.2000  
(43) 15.03.1999  
(45) 12.09.2000

(12)

(21) 2 215 441

(22) 15.09.1997

(73)

BROWN, Randy J.  
350 Queens Quay West Apt.  
1106 TORONTO O1 (CA).

(51) Int. Cl. \*: **H01R 013/73**

(72)

BROWN, Randy J. (CA).


(74)

EGGINS, DOUGLAS W.

(54) PRISE MULTISERVICE POUR ENCASTREMENT DANS LE PLANCHER  
(54) MULTI-SERVICE FLOOR OUTLET

(57)

A flush-mounted, multi-service floor outlet, gives economic supply of flush-fitting power and electronic jacks, such as Category 5 data jacks, within existing office towers having poured concrete floors, as original equipment, or by retrofit or in relocating such services, while maintaining effective fire separation between the respective floors of the building. A unitary, longitudinally compartmented cylindrical metal housing is located in penetrating relation through an existing concrete floor, and the power, voice and data connections are routed through the ceiling space of the underlying room, the conduits for which are threaded into a base portion of the housing. The outlet housing provides a nominal fit within a standard sized hole drilled through the concrete floor to render the installation substantially fireproof. A top flange, and removable bottom flange such as a nut complete the fireproofing and secure the housing in place. The compartment partitions are withdrawable to facilitate installation and servicing. The substantially planar top face of the outlet fits effectively flush with the usual carpet floor covering.






(72) BROWN, Randy J., CA

(73) BROWN, Randy J., CA

(51) Int. Cl. 6 H01R 13/73

(51) PRISE MULTISERVICE POUR ENCASTREMENT DANS LE  
PLANCHER

(54) MULTI-SERVICE FLOOR OUTLET

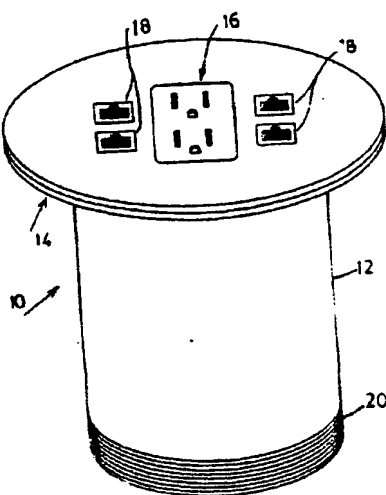

(57) La présente invention a pour objet une prise multiservice pour encastrer dans le plancher; outre son aspect pratique, celle-ci permet une économie de connecteurs électroniques, tels des jacks pour installations électroniques de catégorie 5, et peut être encastrée dans les planchers en béton d'édifices à bureaux existants à titre d'installation d'origine ou dans un contexte de modernisation ou de relocalisation, tout en assurant le maintien d'une séparation coupe-feu entre les planchers respectifs du bâtiment. Un boîtier unitaire cylindrique en métal à cloisonnement longitudinal est introduit à l'intérieur du plancher de béton existant; les

(57) A flush-mounted, multi-service floor outlet, gives economic supply of flush-fitting power and electronic jacks, such as Category 5 data jacks, within existing office towers having poured concrete floors, as original equipment, or by retro-fit or in relocating such services, while maintaining effective fire separation between the respective floors of the building. A unitary, longitudinally compartmented cylindrical metal housing is located in penetrating relation through an existing concrete floor, and the power, voice and data connections are routed through the ceiling space of the underlying room, the conduits for which are threaded into a base portion of the



(11)(21)(C) **2,215,441**

(22) 1997/09/15

(43) 1999/03/15

(45) 2000/09/12

conducteurs d'électricité, les lignes téléphoniques et de transmission de données sont acheminées à l'intérieur du faux-plafond aménagé à l'étage inférieur, les extrémités filetées de ces conduits étant vissées dans la base du boîtier. La prise en question est logée à l'intérieur d'un boîtier dont les dimensions nominales correspondent à un trou de diamètre standard percé dans le plancher en béton, ce qui permet de réaliser une installation essentiellement à l'épreuve du feu. Une bride supérieure ainsi qu'une bride inférieure associée à un écrou complètent et assurent la réalisation d'une installation à l'épreuve du feu. Les cloisons aménagées à l'intérieur du boîtier, amovibles, facilitent la mise en place et l'entretien de l'installation. La surface supérieure essentiellement plane de la prise en question contribue à assurer une finition en affleurement avec les revêtements de tapis usuels.

housing. The outlet housing provides a nominal fit within a standard sized hole drilled through the concrete floor to render the installation substantially fireproof. A top flange, and removable bottom flange such as a nut complete the fireproofing and secure the housing in place. The compartment partitions are withdrawable to facilitate installation and servicing. The substantially planar top face of the outlet fits effectively flush with the usual carpet floor covering.



Industry Canada Industry Canada

ABSTRACT

A flush-mounted, multi-service floor outlet, gives economic supply of flush-fitting power and electronic jacks, such as Category 5 data jacks, within existing office towers having poured concrete floors, as original equipment, or by retrofit or in relocating such services, while maintaining effective fire separation between the respective floors of the building. A unitary, longitudinally compartmented cylindrical metal housing is located in penetrating relation through an existing concrete floor, and the power, voice and data connections are routed through the ceiling space of the underlying room, the conduits for which are threaded into a base portion of the housing. The outlet housing provides a nominal fit within a standard sized hole drilled through the concrete floor to render the installation substantially fireproof. A top flange, and removable bottom flange such as a nut complete the fireproofing and secure the housing in place. The compartment partitions are withdrawable to facilitate installation and servicing. The substantially planar top face of the outlet fits effectively flush with the usual carpet floor covering.

## MULTI-SERVICE FLOOR OUTLET

### FIELD OF THE INVENTION

This invention is directed to a floor outlet for installation through a concrete floor, to provide electrical power and voice/data jack access.

### BACKGROUND TO THE INVENTION

Modern office space is frequently located within high rise buildings having existing concrete floors.

The floor plan for an office is rarely immutable, so that the  
10 location of services such as electrical power, voice and data connections requires a high degree of flexibility. Fire codes frequently require that floor-to-floor interconnection shall be closely restricted, while electrical wiring codes usually require the provision of isolated electrical services.

Many building owners and/or tenants require enclosed electrical and communications wiring in ceiling spaces below. One prior art approach to meet the problems imposed by these strictures has been the use of square, recessable flush outlet housings. A major drawback with this approach is the need to saw cut an  
20 oversized square hole into the concrete floor, and to chisel out to an appropriate depth a recess for housing the outlet. It is then usually necessary to secure the outlet housing in the floor, and to patch, by cementing or grouting the outlet base in place. This can imperil the integrity of the floor, and is usually unacceptable to the structural engineer

who is responsible for the building.

In an existing office, adoption of this procedure often causes unintended, highly undesirable local damage to the area carpeting.

Furthermore, the method is labour-intensive, structurally damaging, and makes difficult the succeeding step of installing the associated conduit.

Another prior art approach is to instal a through-the-floor outlet, such as the "Walkertap" (trademark), referred to  
10 commercially as the " 1500 series flush poke-through" having a cylindrical pot that is installed through the floor. This service outlet, which is nominally "flush", has a domed top plate above which projects the molded housings of the two voice/data jack outlets.

These voice jack outlets are serviced by pigtail connections that hang down within open recesses below the top plate, and the connections pass outwardly through apertures in the wall of the cylindrical pot, thereby providing a pair of vulnerable paths that require to be packed with fire-proof material, in  
20 attempting to meet local fire regulations. These pig-tail connections are serviced within the underlying ceiling space, and in the absence of an enclosure and provision for protection such as a conduit, are vulnerable to unauthorized access. The electrical service occupies the pot, and connects by way of an intermediate conduit with a junction box accessible only

in the underlying ceiling space.

Typically, this high-cost installation provides a slightly domed outlet cover having a pair of flush power outlets and a pair of elevated voice/data jacks, which constitute a tripping hazard in open and multi-use areas.

#### SUMMARY OF THE INVENTION

The present invention provides a unitary, flush mounted, totally enclosed housing for through-floor multi-service installation.

- 10 The subject service housing has a substantially planar top flange secured to a cylindrical housing for insertion in close-fitting relation within a cylindrical bore of predetermined standard size.

The housing includes provision for connection of a plurality of service conduits in threaded relation with the lower end of the housing.

The housing includes interior isolating partition means, to enable physical and electrical isolation of an electrical power service therein.

- 20 In a preferred embodiment interior partition means are removable, to facilitate manual access to the interior of the housing. A plurality of interior partitions may be provided which are removable, for enhanced manual access. The partition means may be of fiberglass or other electrical insulating material. Where internal clearances are adequate

and no possibility of short-circuiting or undesired capacitance effects exists, and where safety codes are not violated, the use of metal partitions is contemplated.

The subject service housing may have housing securing means, in use to secure the housing in installed relation within an aperture.

The housing securing means may comprise a top flange, and a locknut threadedly attached to the lower exterior portion of the housing, to engage the floor lower surface. The locknut also serves to complete the flameproofing of the installation. 10 An alternative securing means that is contemplated may comprise a grubscrew or capscrew, the point of which extends outwardly from within the housing, in use to engage the interior of the bore within which the housing is inserted to hold the housing secured therein.

The subject service may include removable cap means, to provide access from above to the interior of the housing. The removable cap means may comprise an outer cover, in securing relation with a plurality of plug-accessed electrical 20 connection units.

The removable cap means may include a flange portion of the pot, by means of which the pot is supported in its position by the surrounding floor.

The removable cap means are preferably secured by way of screws that are recessed in flush relation with the respective cover



top surface, and engage threaded apertures of the housing. The housing may include threaded recesses in a lower portion of the housing, to receive conduit connectors in screwed secured relation therein. The conduit connectors, in turn, receive electrical conduit in connecting relation therewith. The housing may include a unitary bottom portion having a plurality of threaded recesses for the aforesaid conduit connectors.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Certain embodiments of the invention are described by way of 10 illustration, without limitation of the invention thereto, other than as set forth in the accompanying claims, reference being made to the accompanying drawings, wherein:

Figure 1 is a front-and-top perspective view of a housing according to the present invention, complete with a plurality of power and voice/data receptacles;

Figure 2 is a side view of the subject housing, in diametrical section;

Figure 3 is an exploded view, in perspective, showing the major components of the Figure 1 embodiment in exploded 20 relation; and,

Figure 4 is an enlarged view of a component portion of Figure 3.

#### DETAILED DESCRIPTION OF THE INVENTION.

Referring to Figure 1, the multi-service floor outlet 10 according to the present invention comprises a cylindrical

barrel portion 12 of fireproof material, preferably aluminum for weight and handling considerations.

A flanged cap portion 14 secures a duplex power outlet 16 and four Category 5 voice/data jacks 18.

The outer portion 20 of the bottom of barrel portion 12 is threaded.

Referring to Figures 2 and 3, a removable nut 22 is mounted upon the threaded portion 20.

A bottom closure plate 24 is shown, preferably secured by 10 welding to the barrel portion 12. The plate 24 is illustrated as having four threaded apertures 25 therein, to receive electrical conduit elbows (not shown), secured in screwed relation therein.

Removable partition means 27 having opposed plate portions provide segregated wiring paths, primarily for the conductors for the duplex power outlet 16.

The slender flanged cap portion 14 may be installed so as to sit upon the concrete floor, the top of the outlet 10 being then substantially flush with the surface of the surrounding 20 carpet (not shown).

The cap portion 14 includes a circular plate 26 having off-set rectangular recesses to locate voice/data jacks 18.

An overlying plate 28 serves to locate the duplex power outlet 16.

The plate 28 has two pairs of slots 27', by which partitions 27

may be inserted in positioned, secured relation.

The cap portion 14 includes a first flange plate 30, which encircles the power outlet 16 and jacks 18 and is secured by screws 29 to the upper rim of barrel portion 12.

A second flange portion of cap portion 14, plate 36, serves as a closure plate and is secured by screws to the first flange plate 30. The plate 36 has recesses 40, 44 in which the dual head portions of the power outlet 16, and the four jacks 18 are accommodated in flush relation.

10 In use the outlet 10 is installed within a core-drilled through-hole, in close-fitting relation therein, being secured and effectively sealed in place by way of the flanges of cap portion 14, and the nut 22.

The partition means 27 may be removed during installation to facilitate the introduction of the respective wiring (not shown).

It will be understood that certain changes and modifications of the presently disclosed embodiments may be made without departing from the ambit of the present invention, as set forth

20 in the accompanying claims.

#### COMMERCIAL UTILIZATION

There is a widespread market, both in North America and elsewhere, in high-rise concrete buildings, to safely accommodate the wiring needs of modern telecommunications and electronics, along with power supplies, while maintaining required standards against flame penetration.

CLAIMS

1. A fire-resistant multi-service outlet for mounting in a bore of predetermined standard size drilled through an existing concrete floor, to minimize structural damage to the floor, comprising a totally enclosed cylindrical housing having a shallow cover portion in substantial closing relation with the top of the cylindrical housing; said cylindrical housing having an outer diametrical dimension nominally less than said predetermined standard drilled bore; locating means for securing said housing in said floor;  
10 at least two accesses in a lower portion of the cylindrical housing, to receive an electrical conduit and a further service conduit in attached relation thereto; an electrical outlet and at least one further service outlet secured in substantially flush-mounted relation with said cover portion, said housing fitting in secured, substantially sealing relation within said bore to maintain a fire separation and maintaining said outlets substantially level with said floor.
2. The service outlet as set forth in claim 1, wherein said electrical outlet is a power outlet.
3. The service outlet as set forth in claim 1, said lower portion having a plurality of said accesses; said cover portion having a plurality of said electrical outlets; and partition means within said housing to provide at least one

isolated path between a first one of said lower accesses and a first one of said electrical outlet.

4. The service outlet as set forth in claim 3, said partition means being withdrawable from said housing, in use to facilitate the installation of electrical wiring between said first access and said first electrical outlet.

5. The service outlet as set forth in claim 4, said partition means comprising a plurality of separable partition portions, in use to provide a plurality of individual paths between said lower accesses and respective ones of said electrical outlets.

6. The service outlet as set forth in claim 3, said first electrical outlet being a power outlet.

7. The service outlet as set forth in claim 5, having said electrical outlet and a plurality of voice/data outlets in mutually isolated relation.

8. The service outlet as set forth in claim 1, said housing locating means including radially extending abutment means removably attached to a lower end portion of said housing, in use to extend in overlapping, substantially sealing relation with an adjacent concrete surface portion of said floor.


9. The service outlet as set forth in claim 1, said housing locating means including a rotatable nut threadedly attached to a lower end portion of said housing, and rotatable thereabouts, in use to engage an adjacent concrete surface constituting a portion of said floor.

10. The service outlet as set forth in claim 8, including flange means extending radially outwardly from said housing, in use to engage the surface of said floor adjacent said housing.


11. The service outlet as set forth in claim 3, said partition means being electrically non-conductive.

12. A fire-resistant multi-service outlet for mounting in a bore of predetermined standard size drilled through an existing concrete floor, to minimize structural damage to the floor, comprising a totally enclosed cylindrical housing having a shallow cover portion in substantial closing relation with the top of the cylindrical housing; said cylindrical housing having an outer diametrical dimension nominally less than said predetermined standard drilled bore; locating means for securing said housing in said floor, including a top flange portion in overlying relation with said floor, and lower locating means removably secured to said housing, and extending in underlying relation with said

floor, in substantial sealing relation with said bore;  
at least two accesses in a lower portion of the cylindrical  
housing, to receive an electrical conduit and a further  
service conduit in attached relation thereto; an electrical  
outlet and at least one further service outlet secured in  
substantially flush-mounted relation with said cover portion,  
said housing fitting in removably secured, substantially  
20 sealing relation within said bore to provide a fire  
separation and to locate said outlets substantially level  
with said floor.

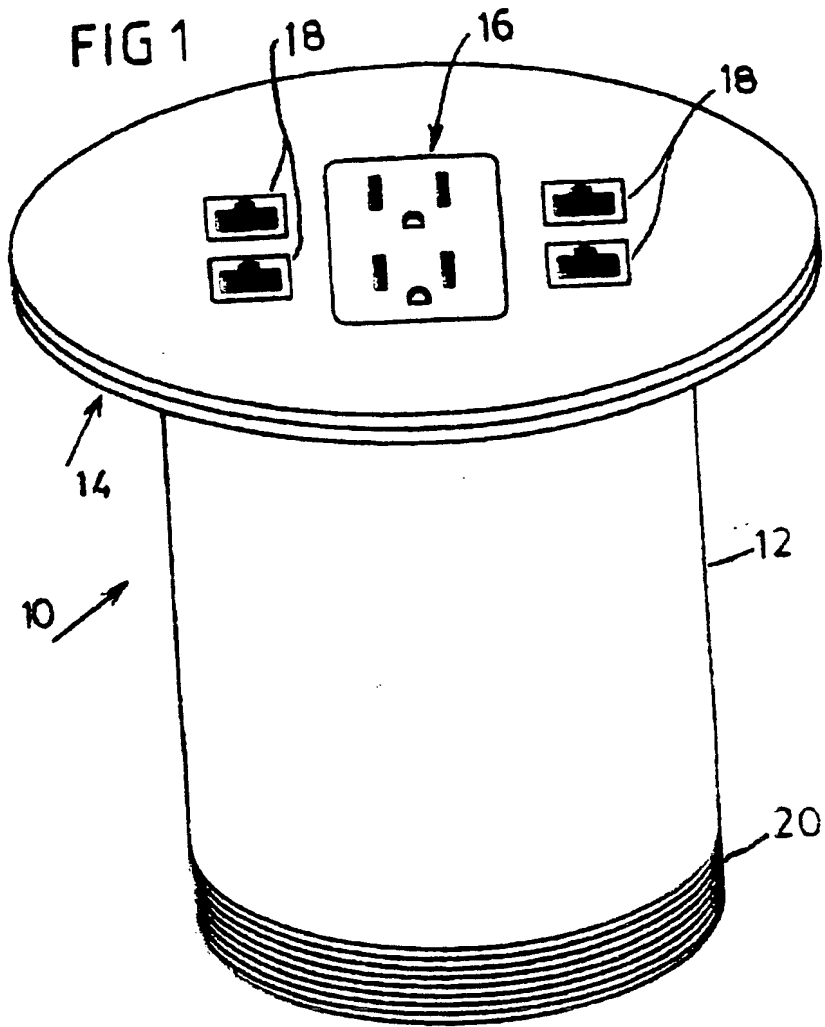



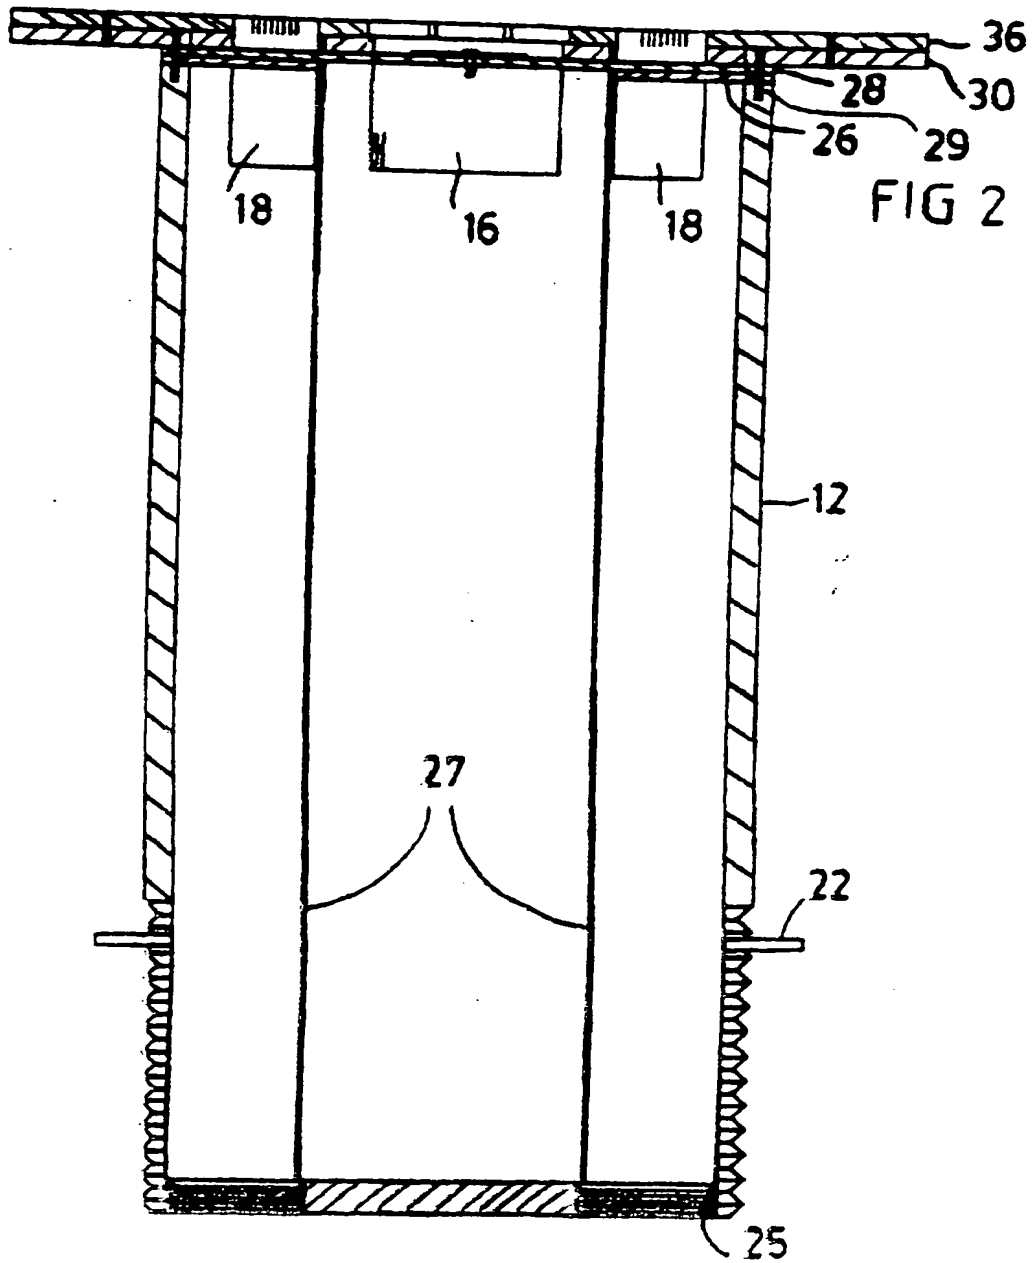


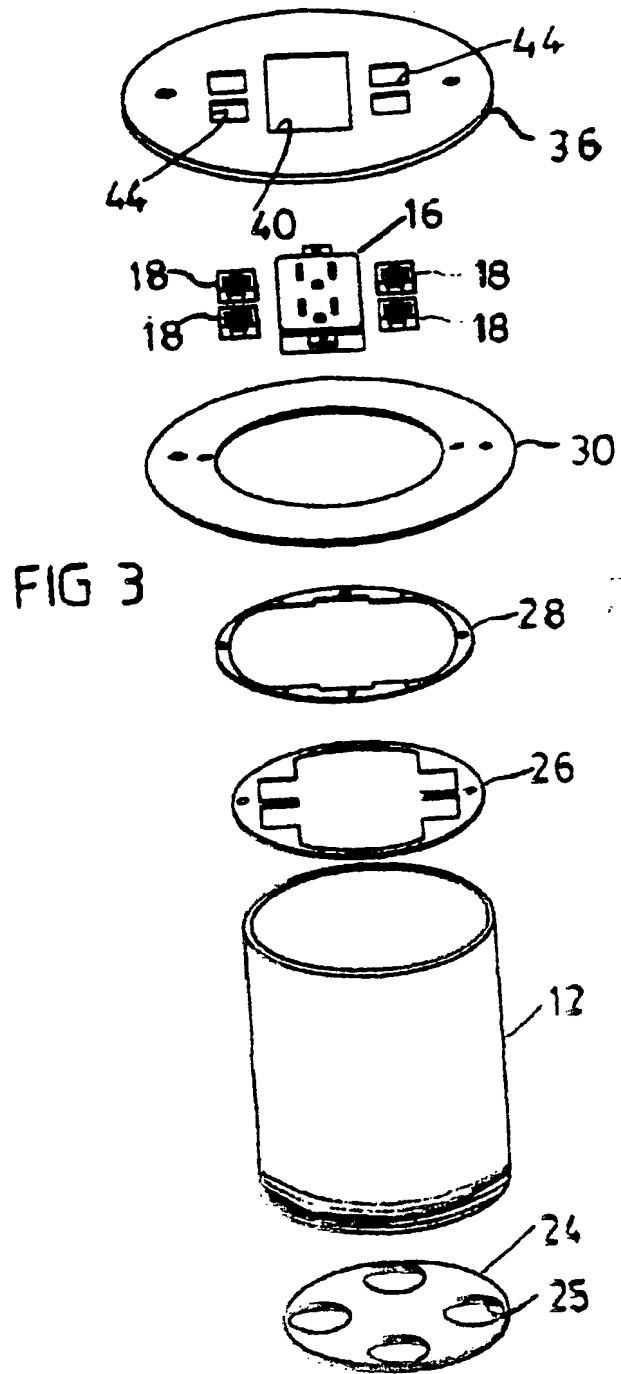


FIG 4

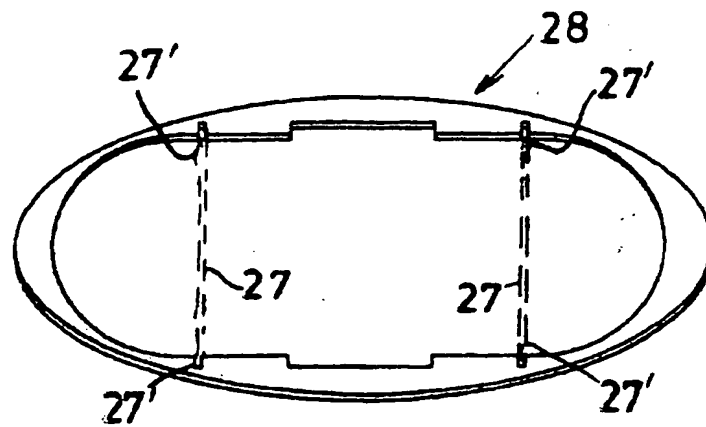

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)